

JACK
World No.1

Shanghai stock
listed




Jack Facebook



YouTube



Light and Heavy Adjustable Power Saving Overlock Machine

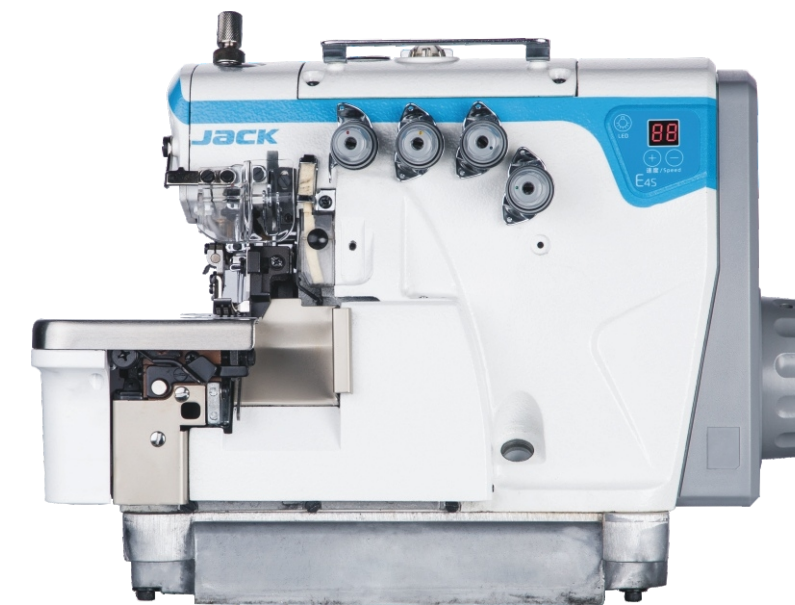


E4S

JACK TECHNOLOGY CO.,LTD

ADD:No.1008, Donghai Avenue East, Jiao jiang District, Taizhou City,
Zhejiang Province, China
TEL:0086-576-88177782

E-mail: sales@chinajack.com
www.chinajack.com


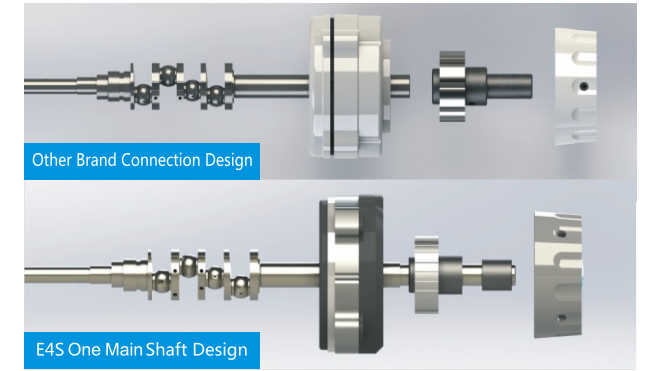


4 One-key reset, easy learn and use

Keyboard type one-key reset design, no need training, easy operation; convenient upgrade interface design, can upgrade the software quickly, which help garment factory to keep up with the latest technology


5 One Main shaft design, stable and fast

Reduce the torque of the machine and ensure more stable running, sewing speed faster and more durable.

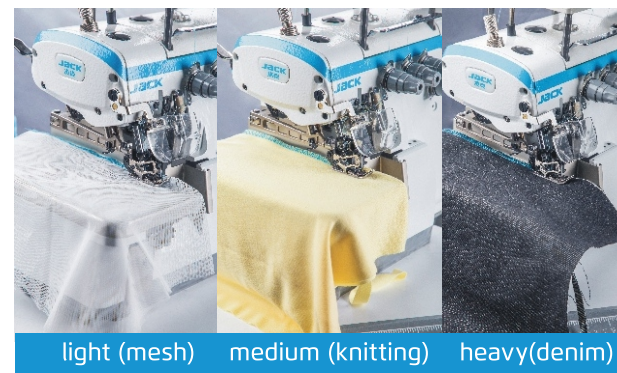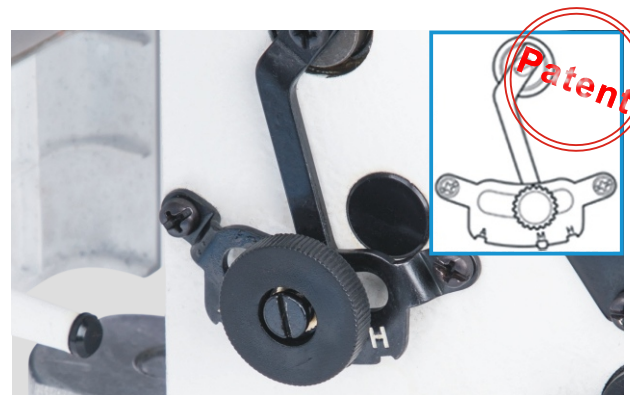

1 Light and heavy adjustable freely

Through light ,medium ,heavy three modes adjustment , can convert from A type–light material ,M type –medium material to H type –heavy material freely ;suitable for mesh, knitting ,denim ,etc different kinds of order demands.

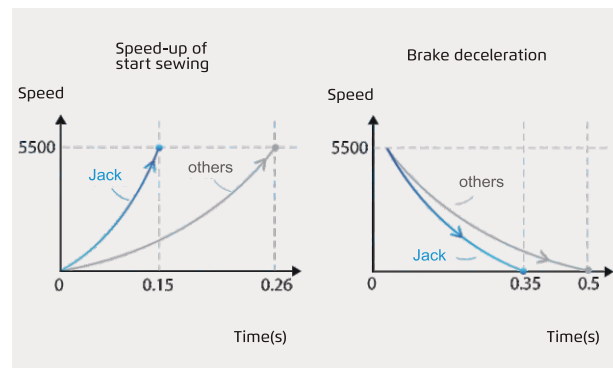

2 Super quick response for start and brake, strong and powerful

Compare with other direct-drive overlock machines, shorter 40-50% for comprehensive start and brake response time, obviously increase the efficiency, sewing speed experience is light and fast, increase income efficiently.

3 Needle bar avoid oil-leakage ,clean sewing

Needle bar adopts full sealed suction oil-return device, special oil seal for the feed bar, prevent oil outside efficiently and ensure the improvement of the product quality.

Specification

Model	Needle	Needle No.	Thread No.	Needle Distance (mm)	Stitch Width (mm)	Stitch Length (mm)	Differential Ratio	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	Volume (mm)	Weight (kg)
E4S-2(Fabric Joint Seaming)	11#	1	2	—	6	4	0.7-2	3.5	5500	525*360*510	28/36
E4S-02x250(Pocket Binding Seaming)	14#	2	4	5	—	4	0.7-2	3.5	5500	525*360*510	28/36
E4S-3-02/233(Plain Seaming)	11#	1	3	—	4	4	0.7-2	5	5500	525*360*510	28/36
E4S-3-82/233(Back Latching)	11#	1	3	—	4	4	0.7-2	5	5500	525*360*510	28/36
E4S-3-32R/233(Narrow Sewing)	9#	1	3	—	1.5	4	0.7-2	5	5500	525*360*510	28/36
E4SWF-3-02/213(Non-woven Material)	14#	1	3	—	4	8.5	—	5.5	5500	525*360*510	28/36
E4S-4-M03/333(Plain Seaming)	11#	2	4	2	4	4.6	0.7-2	5.5	5500	525*360*510	28/36
E4S-4-83/323(Back Latching)	11#	2	4	2	4	4.6	0.7-2	5.5	5500	525*360*510	28/36
E4S-4-M03/333/H/M(Heavy Duty)	11#	2	4	2	4	4.6	0.7-2	5.5	5500	525*360*510	28/36
E4SMJ-4-53/233(Towel Ending)	11#	2	4	2	4	4	0.7-2	5	5500	525*360*510	28/36
E4S-5-53/233(Tape Attaching Seaming)	14#	2	5	3	4	4	0.7-2	5	5500	525*360*510	28/36
E4S-5-02A/233(Light material)	11#	2	5	3	4	4	0.7-2	5	5500	525*360*510	28/36
E4S-5-03/233(5x5 Stitch)	14#	2	5	5	5	4	0.7-2	6	5500	525*360*510	28/36
E4S-5-03/333(3x4 Stitch)	14#	2	5	3	4	4	0.7-2	5	5500	525*360*510	28/36
E4S-5-M04/435(Especially For Denim)	19#	2	5	5	6	5	0.8-1.5	7	5500	525*360*510	28/36
E4S-5-A04/435(Extra Heavy Duty)	19#	2	5	5	6	5	0.8-1.5	7	5500	525*360*510	28/36
E4S-6-03/333(Plain Seaming)	11#	3	6	3×2	4	4	0.7-2	5	5500	525*360*510	28/36
E4S-6-M04/435(Especially For Denim)	19#	3	6	5×2.5	3.5	5	0.8-1.5	7	5500	525*360*510	28/36

Note:H/M suitable for light and heavy; optional device KS (vertical suction device) and KH(horizontal suction device); machine volume:525*360*630(mm), weight 28/39(kg)