

### **Bartacking Machine**



### **Button Attaching Machine**

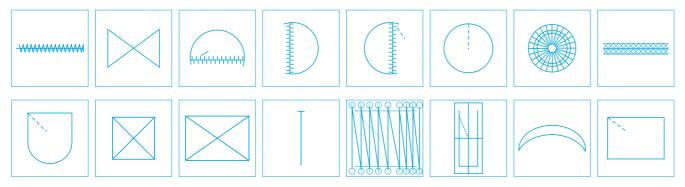



# High-speed computerized bartack machine







YouTube



## JACK TECHNOLOGY CO., LTD

ADD:No.1008, Donghai Avenue East, Jiao jiang District, Taizhou City, Zhejiang Province, China TEL:0086-576-88177782

E-mail: sales@chinajack.com www.chinajack.com



## World No.1

## JK-T1900G/1903G/1906G

## JK-T1900G/1903G/1906G

Item: High-speed computerized bartack machine Features:One-minute fast change of bartack and button-attach, one machine with two functions



#### 1 One Machine, Multi Functions


JK-T1900GSK/1903GSK:Bartacking and Button attaching can be transferred easily. Increase efficiency and save cost.

JK-1906GP:Suitable for various kinds of elastic attaching.

JK-1906GS:Suitable for tacking and decorative sewing of non-woven bags, shopping bags, velcro, shoes, luggage etc..The sewing range is 60\*50.

JK-T1900GM-D II c for knitting only) suit for underware, bra and other knitting fabric bartack sewing. JK-T1900GH-D II suit for jeans, bags, shoes and other thick fabric bartack sewing.





2 Super Heavy Duty Can Be Sewing Smoothly

Can easily sew the backing of luggage and fishing net



4 Simple and Visualized, Easy to Operate

Operator panel can display parameters and patterns,Easy to learn and easy to use.No need to worry about remembering parameters 3 Sewing Easily; High Efficiency

The max speed is 3200 rmp, high efficiency



5 Automatic Button Feeding Device, High Efficiency(JK-T1903GR)

Automatic button feeding , the efficiency is increased to 180% compared with manual feeding



6 Thread Remaining Tacking and Cleanness No need manual trimming. High efficiency

### **Bartacking Machine Specifiction**

Model	Application	Needle	Needle No.	Thread No.	Sewing range (X) (mm)	Sewing range (Y) (mm)	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	Volume (mm)	Weight (kg)
JK-T1900GSK	Light and Medium Fabric	DP×5 16#	1	2	40	30	13	3200	805×405×525	55/64
JK-T1900GS	Light and Medium Fabric	DP×5 16#	1	2	40	30	13	3200	805×405×525	55/64
JK-T1900GHK	Heavy Fabric	DP×17 19#	1	2	40	30	13	2700	805×405×525	55/64
JK-T1900GH	Heavy Fabric	DP×17 19#	1	2	40	30	13	2700	805×405×525	55/64
JK-T1900GSXK	Short Thread Remaining	DP×5 16#	1	2	40	30	13	3200	805×405×525	55/64
JK-T1900GMK	Knitted Fabric	DP×5 11#	1	2	40	30	13	2700	805×405×525	55/64
JK-T1900GM	Knitted Fabric	DP×5 11#	1	2	40	30	13	2700	805×405×525	55/64
JK-T1900GY	Cap Hole	DP×5 16#	1	2	40	30	13	2700	805×405×525	55/64
JK-T1900GN	Fishing Net	DP×17 19#	1	2	40	30	13	2300	805×405×525	55/64
JK-T1900GL	Socks Sewing	DP×17 14#	1	2	40	35	13	2000	805×405×525	55/64
JK-T1906GS	Pattern	DP×17 14#	1	2	60	50	10	2700	805×405×525	55/64
JK-T1906GP	Elastic Attaching	DP×17 14#	1	2	60	50	10	2700	805×405×525	55/64

Note: Auto presser foot lifter, auto trimmer, auto wipper are standards. K:Bartacking and Button attaching can be transferred easily. X is short thread remaining.

### **Button Attaching Machine Specifiction**

Model	Application	Needle	Needle No.	Thread No.	Button diameter (mm)	Button size (mm)	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	Volume (mm)	Weight (kg)
JK-T1903GSK	Basic Model	DP×17 14#	1	2	Φ8-Φ30	X:2.4-6.8 Y:2.4-6.8	10	2700	805×405×525	55/64
JK-T1903GR	Auto Button Feeding Device	DP×17 14#	1	2	Φ9-Φ22	X:2.4-6.8 Y:2.4-6.8	13	2700	1020×870×1390	131/177
JK-T1903GS	Button Attaching Machine	DP×17 14#	1	2	Φ8-Φ30	X:2.4-6.8 Y:2.4-6.8	10	2700	805×405×525	55/64

Note: Auto presser foot lifter, auto trimmer, auto wipper are standards. K:Bartacking and Button attaching can be transferred easily.

