

JACK

China No.1

JK-8558G

Power Saving Chain Stitch Machine



Power saving




Auto presser foot lifter



Rear puller



Two needle gauges (JK-8560G)

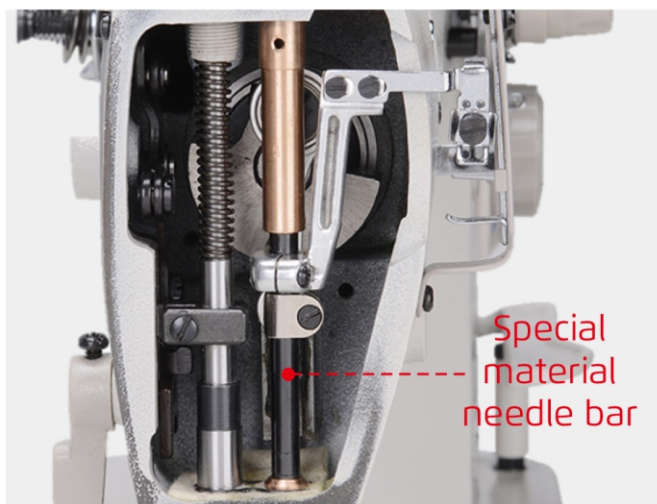

Semi-dry

Model	Needle Array	Needle Gauge	Needle	Needle No.	Thread No.	Needle Distance (mm)	Presser Foot Height (mm)	A	M	H	Max. Speed (s.p.m)	Volume (mm)	Weight (kg)
JK-8558G-WZ	Parallel Double Needle	1/4,3/16, 1/8,3/8	TV×7 14#	2	4	1.4-4	4.5 (knee Control 8-10)	√	√		4000	675×275×595	39/47
JK-8558G-WTZ	Parallel Double Needle	1/4,3/16, 1/8,3/8	TV×7 14#	2	4	1.4-4	4.5 (knee Control 8-10)	√	√		4000	675×275×595	39/47
JK-8558G-1WZ	Single Needle	-	TV×7 14#	1	2	1.4-4	4.5 (knee Control 8-10)	√	√		4000	675×275×595	39/47
JK-8558G-2WZ	Vertical Double Needle	3/16	TV×7 14#	2	4	1.4-4	4.5 (knee Control 8-10)	√	√		4000	675×275×595	39/47
JK-8560G-WZ	Slant Three Needle	1/8	TV×7 14#	3	6	1.4-4	4.5 (knee Control 8-10)	√	√		4000	675×275×595	39/47
JK-8560G-WZ-PL	Slant Three Needle	1/8	TV×7 18#	3	6	1.4-4	4.5 (knee Control 8-10)		√		4000	675×275×595	39/47
JK-8560G-PHWZ	Trigonal Three Needle	1/8	TV×7 21#	3	6	1.4-4	4.5 (knee Control 8-10)		√	√	4000	675×275×595	39/47

Note: T: auto presser foot lifter, 8558G/8560G: auto presser foot lifter is optional.

PL: rear puller.

PL(X): Rubber puller.