

14 years  
World No.1\*

**JACK**

14 years  
World No.1\*



Jack Facebook




Jack YouTube



# J6

## Quick Reorder Pocket Welting Machine

No picking fabric No reworking

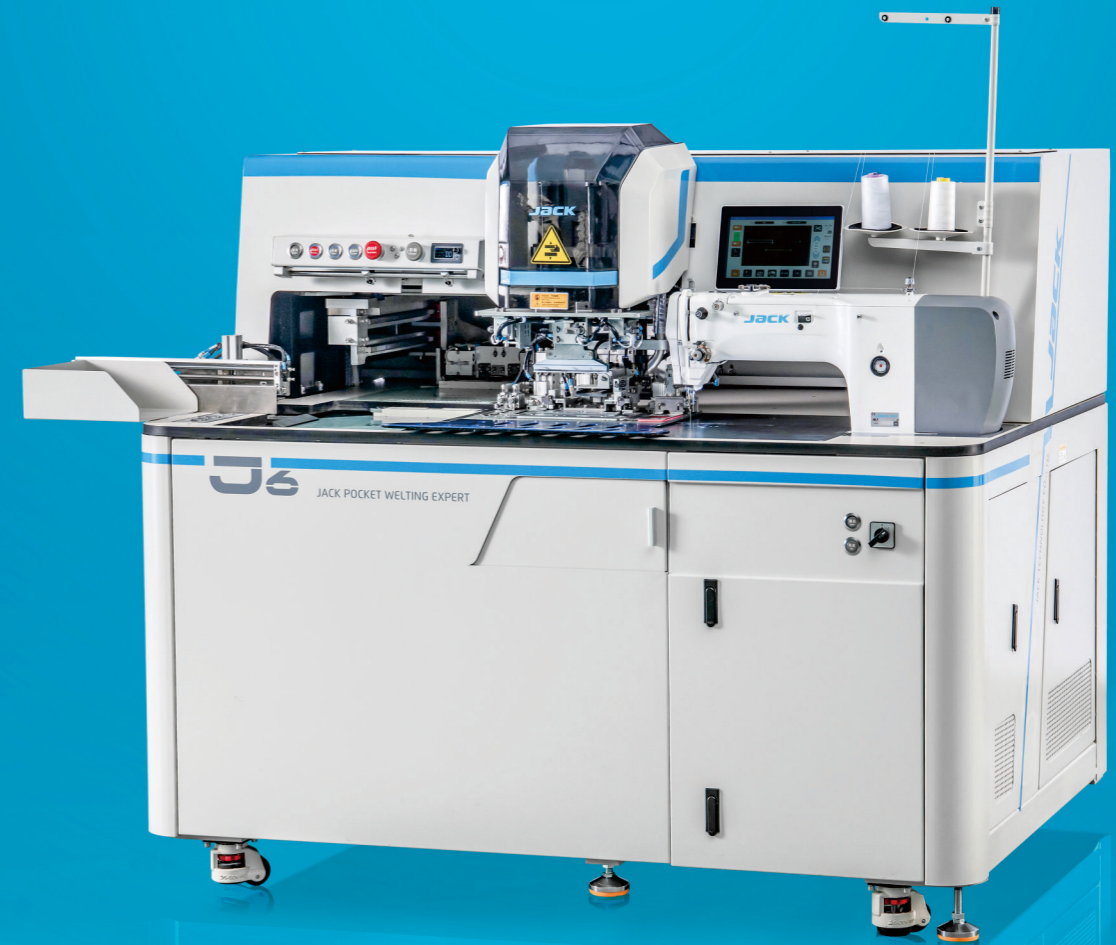

### JACK TECHNOLOGY CO.,LTD

ADD:No.1008, Donghai Avenue East, Jiao jiang District, Taizhou City,  
Zhejiang Province, China  
TEL:0086-576-88177782

E-mail: [sales@chinajack.com](mailto:sales@chinajack.com)  
<https://www.chinajack.com>


\*Source: Frost & Sullivan's research based on the number of industrial sewing machines sold by major global industrial sewing machine companies in each year between 2010 and 2023, market research completed in September 2024.

\*数据来源: 弗若斯特沙利文按全球各大工业缝纫机企业于2010年至2023年间每年的工业缝纫机销售台数统计, 于2024年9月完成调研。

No picking fabric  
No reworking  
\$90,000 more a year




• Ergonomic design

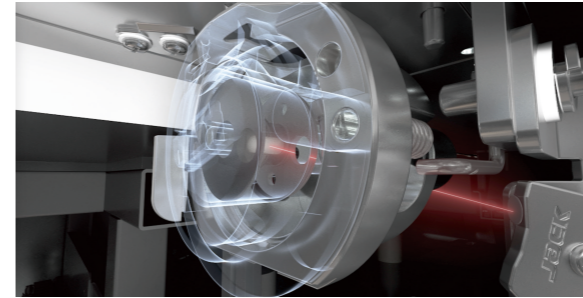

Bottom thread detection


The first in the industry, no empty needle, no waste piece, no needle breakage

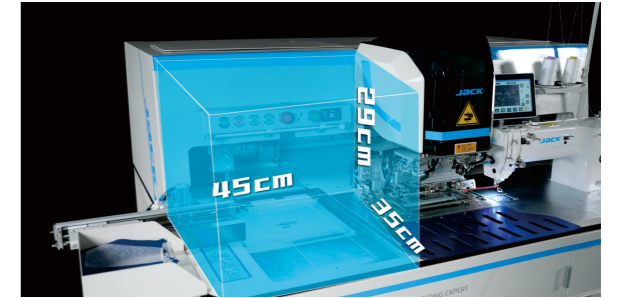

Extra large space


93% increase in operating space, more efficient in placing fabric

• Quick reorder folding pocket technology

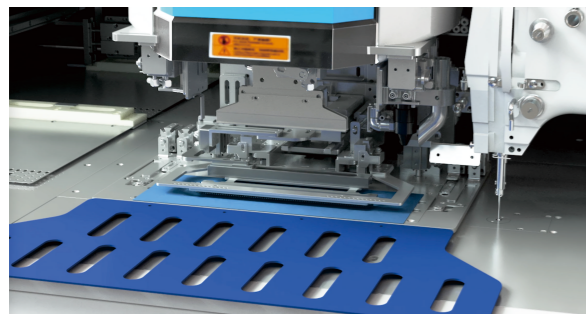

Patented Electronic Folding Knife


Adaptive to thin and thick fabric, Sewing with any fabric

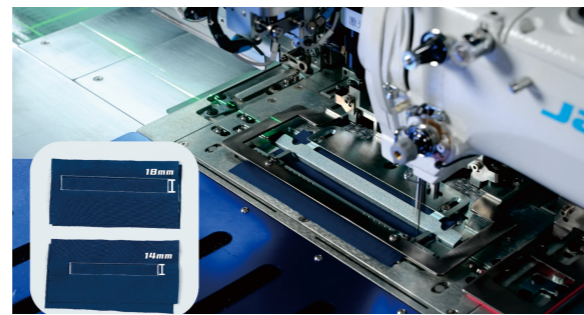

One mould, multiple sizes

3-minute mould change

• Quick reorder pocket closing technology

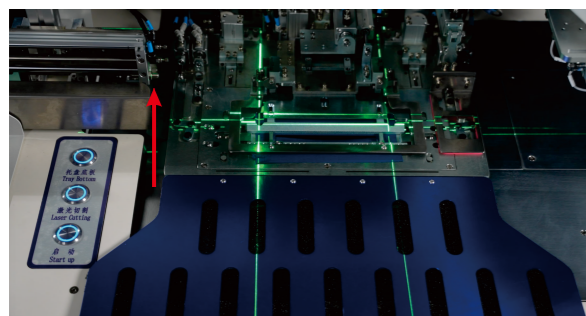

Bi-directional three-dimensional pocket

No shaking of the pocket closing, no running of the folded edges, rework rate <0.3%



Stable pressing of the fabric throughout the whole process

20% reduction in feeding fabric, 20% improvement in sewing efficiency

Sewing with any fabric




single jettted pocket



single jettted pocket +zipper



single zipper



double jettted pocket



zipper+zipper cap



Three sided sewing (top)



double jettted pocket zipper+zipper cap



double jettted pocket +pocket flap




Three sided sewing (left)



fake pocket



parallelogram



Special shapes

Technical parameters

Machine head sewing speed	2800-3000rpm
equipped with machine head	shuttle type
Needle	DP*17
Sewing seam programming	Operation screen input method
Stitch Editing Storage Capacity	Stores 999 clock patterns
needle gauge	1.0mm--3.5mm
Presser foot rise height	60mm--80mm
Sewing pocket range	X-direction100mm-220mm
Sewing pocket speed	Y-direction8mm-40mm
Pocket folding method	10-15Seconds/pc

Pocket folding method	Four-way simultaneous quadruple fold pocket
Pocket welting method	laser cutting
laser power	120W
thread breakage sensor	Intelligent thread breakage sensor
Bottom thread detection	Bottom thread detection function
Fabric placement	Three-dimensional sewing pocket
Sewing work pattern	Pocket folding and sewing simultaneously
Fabric feeding drive method	Servo motor drive
Bottom pocket sewing	Secondary sewing method
power supply	220V