14 years
World No.1*

Jack Facebook

Jack YouTube

Jack WeChat

400-8876-858
cn.chinajack.com

**JACK TECHNOLOGY CO.,LTD**

ADD:No.1008, Donghai Avenue East, Jiao jiang District,
Taizhou City, Zhejiang Province, China
TEL:0086-576-88177782.

*Source: Frost & Sullivan's research based on the number of industrial sewing machines sold by major global industrial sewing machine companies in each year between 2010 and 2023, market research completed in September 2024.

14 years
World No.1*

JACK

# W5E

## Stepping flatbed high speed computerized interlock sewing machine


**High efficiency and stability/one machine multi-function**

- **Auto trimming、Save manpower and threads**
- **sew thin and thick,beautiful stitch**
- **Step drive, stable and silent**
- **one machine multi-purpose**



# W5E



Stepping motor

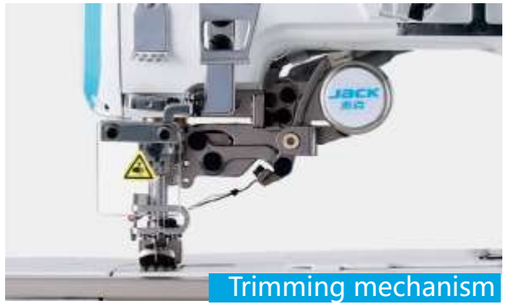
Trimming mechanism

## 1 Trimming accurate, long life, light sound

The sound of the machine is reduced by **at least 6 decibels**, no noise, no noise; Double the strength of trimming cutting  and lifting press foot, accurate trimming cutting, no failure; Longer service life; Completely eliminates the issues of traditional electromagnetic decay and weakness



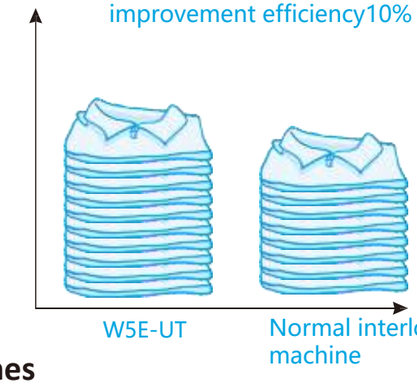



## 2 Auto trimming，Save  manpower and stitches

The comprehensive production capacity is increased by 10%

. The short threads ends can save 324 kilometers of thread per year and eliminate the separate thread-cutting process

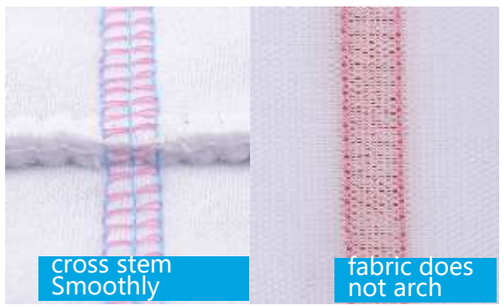


## 3 Sew thin and thick, beautiful stitch

Expand the range of sewing, mesh, thick underwear and other knitted fabrics can be applied


Roll collar sewing


Cover sewing


Hem  sewing


Basic sewing

## 4 one machine multi-purpose

One machine multi-purpose, fast switching: 01GB, 02BB, 03DB, 08AC four models of sewing table universal, four models can be simple and fast switching, no need to buy new sewing table accessories

### Technical specification

| Model | Apply | Needle | Needle NO. | Thread NO. | needle gauge (mm) | Stitch width (mm) | Differential ratio | Presser lift height (mm) | Max speed (S.p.m) | Volume (mm) | Weight (kg) |
|---|---|---|---|---|---|---|---|---|---|---|---|
| W5E-UTL-01GB | Basic sewing | UY128GAS 11-14# | 3 | 5 | 1.5-4.5 | 5.6/6.4 | 0.65-1.3 | 7 | 5500 | 670×445×595 | 54/64 |
| W5E-UT2-02BB | Roll collar sewing | UY128GAS 11-14# | 3 | 5 | 1.5-4.5 | 5.6/6.4 | 0.65-1.3 | 6 | 5500 | 670×445×595 | 54/64 |
| W5E-UT2-03DB | Cover sewing | UY128GAS 11-14# | 3 | 5 | 1.5-4.5 | 5.6/6.4 | 0.65-1.3 | 7 | 5500 | 670×445×595 | 54/64 |
| W5E-UT2-08AC | Hem sewing | UY128GAS 11-14# | 3 | 5 | 1.5-4.5 | 5.6/6.4 | 0.65-1.3 | 7 | 5500 | 670×445×595 | 54/64 |
| W5E-UTL-01GB | Basic sewing | UY128GAS 11-14# | 3 | 5 | 1.5-4.5 | 5.6/6.4 | 0.65-1.3 | 7 | 5500 | 670×445×595 | 54/64 |

Note:

1, UT2 stands for computer; Not  standard with scissors line;

2, the computer can be selected UT, with the standard wire cutter.